


Adapter

SC,FC,ST,LC,MTRJ,MU

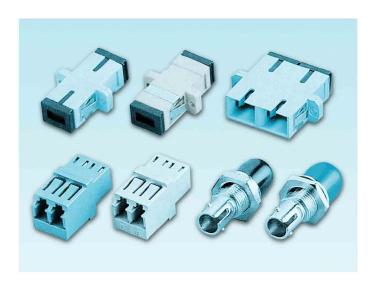

Parameter	Condition	Single Mode	Mulit Mode
Inserion Loss	Zicronia	≦0.2dB	
	Bronze	≦0.2dB	≦0.3dB
Durability	500times	< 0.2dB	< 0.2dB
Operating Temperautre		-40°C~+75°C	

Product Description:

The adapter series are ultra reliable components featuring low insertion loss.

The adapter come with your choice of various types of commonly used models to meet requirements.

Feature:

High connectability Low-insertion loss Low-backreflection loss **Environmental stability**

Application:

Fiber Optical Telecommunications LAN (Local Area Network) **High Speed Transmission Systems EDFA**

