


## Hook-Up Wire

**UL 3132**

### Construction

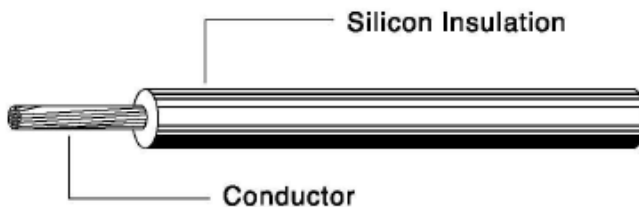

### Product Description

1. Tinned, annealed, stranded or solid copper conductor 30-16AWG
2. Color-coded silicon rubber insulation
3. Rated temperature : 150°C
4. Rated voltage : 300V
5. Pass UL VW-1 & CSA FT1 vertical flame test
6. Resistant to acids, oils, alkalies, moisture and fungus
7. RoHS complaint

### Application:

1. Signal control and instrumentation wire, and internal of appliance and electronic equipment, such as electric heating devices, hair dryer

Part No.	Conductor			Insulation Thickness mm	Overall Diameter mm
	Type	AWG	No./mm		
IHA2000	Stranded	30	19/0.064	0.4	1.12
IHB2000		28	19/0.080		1.20
IHC2000		26	19/0.102		1.30
IHD2000		24	11/0.160		1.40
IHE4000		22	19/0.160		1.60
IHF4000		20	10/0.260		1.80
IHG6000		18	16/0.260		2.00
IHH2000		16	26/0.260		2.40
IHA5000		Top-coated	30		7/1.020
IHB5000	28		7/0.127		1.20
IHC5000	26		7/0.160		1.30
IHD5000	24		7/0.200		1.40
IHE7000	22		7/0.254		1.55
IHF7000	20		7/0.320		1.75
IHG9000	18		7/0.400		2.00
IHH6000	16		7/0.500		2.30
IHA7000	Solid		30		1/0.254
IHB7000		28	1/0.320		1.15
IHC7000		26	1/0.400	1.20	
IHD7000		24	1/0.530	1.35	
IHE9000		22	1/0.650	1.45	
IHF9000		20	1/0.830	1.63	
IHG9000		18	1/1.020	1.80	
IHH8000		16	1/1.290	2.10	