


## Hook-Up Wire

**UL 1569**

### Construction

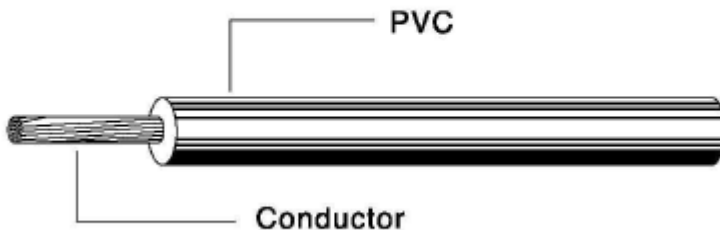

### Product Description

1. Tinned, annealed, stranded or solid copper conductor 30 - 2AWG
2. Color-coded PVC insulation
3. Rated temperature : -20°C ~ 105°C
4. Rated voltage : 300V
5. Pass UL VW-1 & CSA FT1 vertical flame test
6. Uniform thickness of wire to ensure easy stripping and cutting
7. Resistant to acids, oils, alkalies, moisture and fungus
8. RoHS complaint

### Application:

General purpose internal wiring of electronic and electrical equipment

Ordering No.	Conductor			Insulation Thickness	Overall Diameter
	Type	AWG	No./mm	mm	mm
IEA4000	Stranded	30	7/0.102	0.4	1.1
IEB4000		28	7/0.127	0.4	1.2
IEC4000		26	7/0.160	0.4	1.3
IED2000		24	11/0.160	0.4	1.4
IEE2000		22	17/0.160	0.4	1.6
IEF2000		20	21/0.180	0.4	1.8
IEG4000		18	34/0.180	0.4	2.1
IEH2000		16	26/0.254	0.4	2.4
IEI2000		14	41/0.254	0.4	2.8
IEJ2000		12	65/0.254	0.4	3.2
IEK2000		10	105/0.254	0.4	4.3
IEL2000		8	166/0.254	0.8	6.0
IEM2000		6	266/0.254	0.8	7.1
IEN2000		4	420/0.254	0.8	8.4
IEO2000		2	665/0.254	0.8	10.4
IAC5000		Top-coated	26	7/0.160	0.4
IAD5000	24		7/0.203	0.4	1.40
IEE7000	22		7/0.254	0.4	1.60
IEF7000	20		7/0.320	0.4	1.80
IEG9000	18		7/0.404	0.4	2.10
IEH5000	16		7/0.488	0.4	2.30
IEC7000	Solid	26	1/0.404	0.4	1.25
IED7000		24	1/0.511	0.4	1.35
IEE9000		22	1/0.643	0.4	1.50
IEF9000		20	1/0.813	0.4	1.65
IEG9200		18	1/1.024	0.4	1.85
IEH8000		16	1/1.290	0.4	2.15