


Hook-Up Wire

UL 10002

Construction

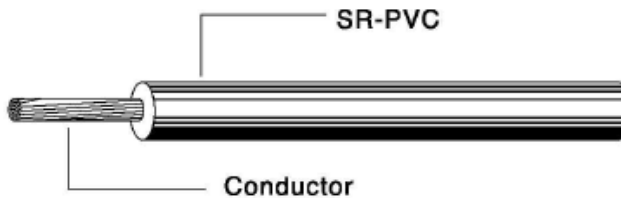

Product Description

1. Solid or stranded, tinned or bare copper conductor 30-16AWG
2. Color-coded semi-rigid PVC insulation
3. Rated temperature : -40 ~ 105°C
4. Rated voltage : 300V
5. Uniform thickness of wire to ensure easy stripping and cutting
6. Pass UL VW-1 & CSA FT1 vertical flame test
7. RoHS complaint

Application:

Internal wiring of computers, office, equipment and other electronic and electrical equipment

Ordering No.	Conductor			Insulation Thickness mm	Overall Diameter mm	
	Type	AWG	No./mm			
IGA4000	Stranded	30	7/0.102	0.25	0.80	
IGB4000		28	7/0.127		0.90	
IGC4000		26	7/0.160		1.00	
IGD4000		24	7/0.203		1.10	
IGE6000		22	7/0.254		1.30	
IGF6000		20	7/0.320		1.50	
IGG6000		18	16/0.254		1.70	
IGH2000		16	26/0.254		2.00	
IGA7000		Solid	30		1/0.254	0.76
IGB7000			28		1/0.320	0.83
IGC7000	26		1/0.404	0.90		
IGD7000	24		1/0.511	1.02		
IGE9000	22		1/0.643	1.15		
IGF9000	20		1/0.813	1.32		
IGG9200	18		1/1.024	1.52		
IGH8000	16		1/1.290	1.80		