


Hook-Up Wire

UL 10918

Construction

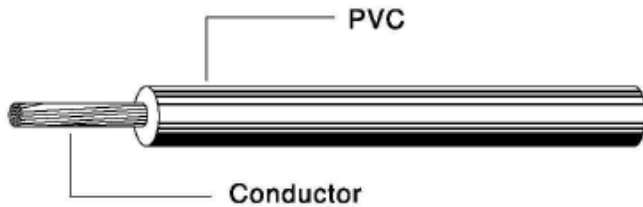

Product Description

1. Tinned, annealed, stranded or solid copper conductor 30-16AWG
2. Color-coded PVC insulation
3. Rated temperature : -40 ~ 105°C
4. Rated voltage : 600V
5. Pass UL VW-1 & CSA FT1 vertical flame test
6. Uniform thickness of wire to ensure easy stripping and cutting
7. Resistant to acids, oils, alkalies, moisture and fungus
8. RoHS complaint

Application:

General purpose internal wiring of electronic and electrical equipment

Ordering No.	Conductor			Insulation Thickness mm	Overall Diameter mm
	Type	AWG	No./mm		
IHA4000	Stranded	30	7/0.102	0.41	1.10
IHB4000		28	7/0.127		1.20
IHC4000		26	7/0.160		1.30
IHD2000		24	11/0.160		1.40
IHE2000		22	17/0.160		1.60
IHF2000		20	21/0.180		1.80
IHG4000		18	34/0.180		2.10
IHH2000		16	26/0.254		2.40
IHC5000	Top-coated	26	7/0.160		1.30
IHD5000		24	7/0.203		1.40
IHE7000		22	7/0.254		1.60
IHF7000		20	7/0.320		1.80
IHG9000		18	7/0.404		2.10
IHH5000	16	7/0.488	2.30		
IHC7000	Solid	26	1/0.404		1.25
IHD7000		24	1/0.511		1.35
IHE9000		22	1/0.643	1.50	
IHF9000		20	1/0.813	1.65	
IHG9200		18	1/1.024	1.85	
IHH8000		16	1/1.290	2.15	