


SAE Battery Cable

SGX

Construction

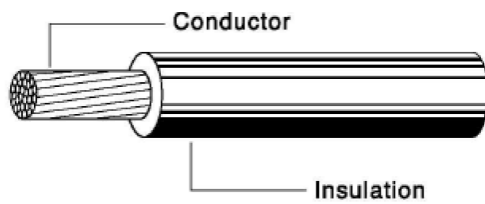

Product Description

1. Automobile, crosslinked polyolefin insulation
2. Conductor Bare copper
3. Crosslinked PE
4. Rated temperature : -40°C ~ 125°C

Application: Automotive, Transportation, Motors and associated machinery,
Agriculture, Construction equipment

Conductor		Insulation Thickness	Overall Diameter	
Type	AWG			No./mm
Stranded	6	266/0.254	1.52	8.6
	4	420/0.254	1.65	10.5
	2	665/0.254		12.0
	1	836/0.254		13.0
	1/0	1064/0.254		14.0
	2/0	1332/0.254		16.0
	3/0	1665/0.254	1.98	18.5
	4/0	2109/0.254		20.0