


Hook-Up Wire

UL 1330

Construction

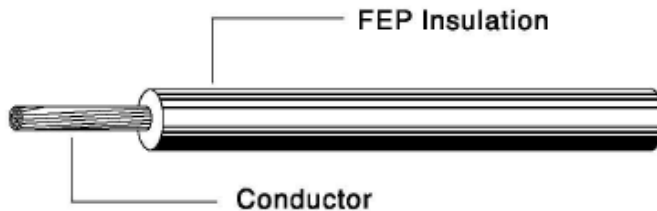

Product Description

1. Tinned copper conductor
2. FEP insulated high temperature single core
3. Rated temperature : 200°C
4. Rated voltage : 600V
5. Horizontal flame test
6. RoHS complaint

Application ranges from household appliances, industrial machines, and high-temperature furnaces.

Conductor			Insulation Thickness mm	Overall Diameter mm
Type	AWG	No./mm		
Stranded	28	7/0.12	0.56	1.39
	26	7/0.16		1.52
	24	19/0.12		1.62
	22	19/0.16		1.78
	20	19/0.20		2.05
	18	19/0.24		2.27
	16	19/0.30		2.53
	14	19/0.37		2.90
	12	19/0.47		3.39
	10	19/0.60		4.04
	8	19/0.75		0.76