


## G657B3 Fiber TPU jacket

### Product structure diagram

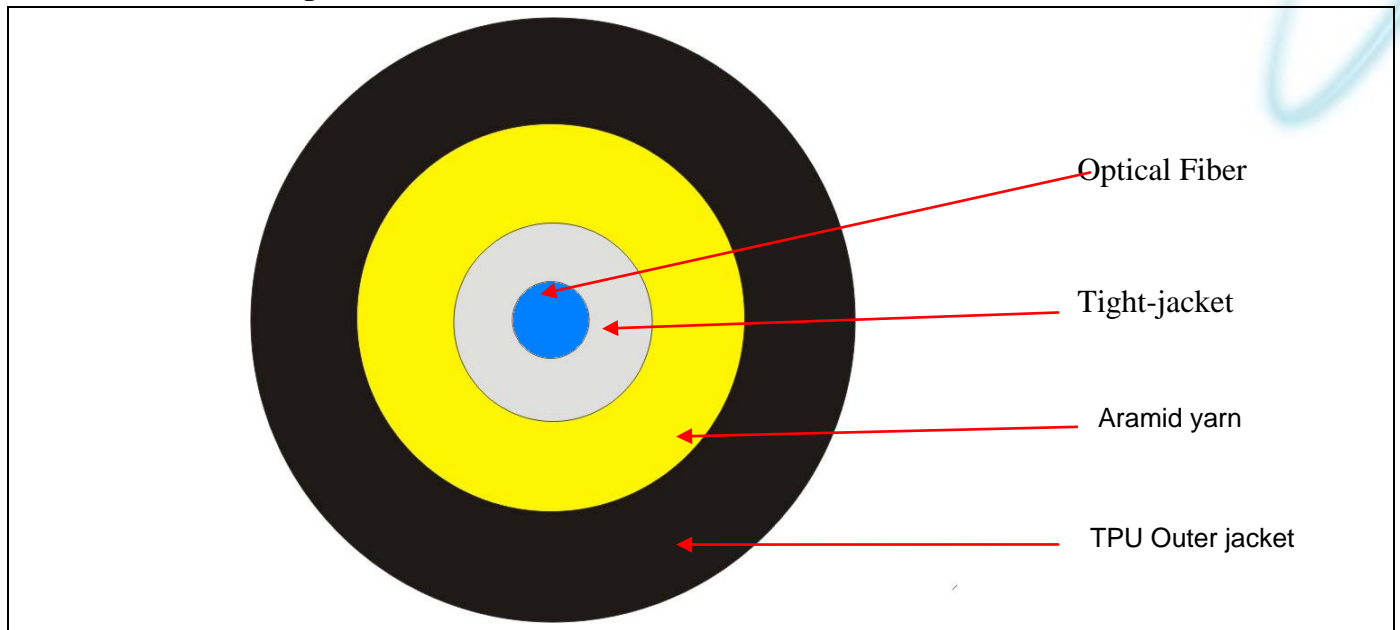

### Construction

1. Optical Fiber
  2. Tight-jacket :0.9mm
  3. Aramid yarn
  4. Outer jacket TPU
- Outside diameter: 3.0±0.2 mm

### Parameters of fiber

Optical fiber type	Unit	SM G652	SM G652D	MM 50/125	MM 62.5/125	MM OM3-300
Waveband	nm	1310/1550	1310/1550	850/1300	850/1300	850/1300
Attenuation	dB/km	0.5/0.4	0.5/0.4	3.5/1.5	3.5/1.5	3.5/1.5

### Product parameters

Performance	Long-term	Short-term
Max. Tension (N)	300	600
Max. Crushing Resistance(N/100mm <sup>2</sup> )	100	500
Min. Bending Radius	30D	15D
Storage and operating temperature	-20°C - +60°C	