


VV JIS C 3342

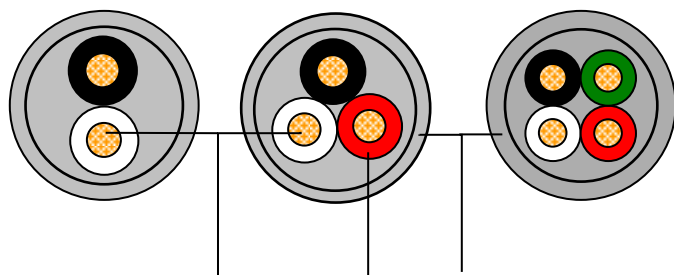

導体 PVC 絶縁体 PVC シース

製品仕様

1. 品名記号: VV・VVR
2. 導体: 軟銅撚り線
3. 絶縁体・シース: PVC
4. 定格温度: 60℃
5. 定格電圧: 600V 以下
6. JIS C3342 認証製品

2心												
導体			絶縁体 厚さ	シース 厚さ	仕上外径 (約)	導体抵抗 (20℃)	試験電 圧	絶縁抵抗 (20℃)	参考			
公称断 面積	構成	外径(約)							概算質量 kg/km	標準条長 m	包装	
mm ²	No./mm	mm	mm	mm	mm	Ω/km	V	MΩ・km				
2.0	7/0.6	1.8	0.8	1.5	10.5	9.42	1500	50	135	300	たば	
3.5	7/0.8	2.4			11.5	5.30			180	200		
5.5	7/1.0	3.0			13.5	3.40			260	150		ドラム
8	7/1.2	3.6			15.5	2.36			360			
直径mm	-	1.0	0.8		8.7	23.3			85	300	たば	
1.0		1.2			9.1	16.1			95			
1.2		1.6			9.9	9.10			130			
1.6		2.0			11.0	5.76			160			
2.0		2.6			13.0	3.42			240			
2.6		3.2			15.0	2.25			335			150
3.2												
3心												
2.0	7/0.6	1.8	0.8	1.5	11.0	9.42	1500	50	165	200	たば	
3.5	7/0.8	2.4			12.5	5.30			235			
5.5	7/1.0	3.0			14.5	3.40			335	300		ドラム
8	7/1.2	3.6			16.5	2.36			465			
直径mm	-	1.0	0.8		9.1	23.3			110	200	たば	
1.0		1.2			9.5	16.1			120			
1.2		1.6			10.5	9.10			155			
1.6		2.0			11.5	5.76			200			
2.0		2.6			13.5	3.42			305			
2.6		3.2			16.0	2.25			435			300
3.2												
4心												
2.0	7/0.6	1.8	0.8	1.5	12.0	9.42	1500	50	200	220	たば	
3.5	7/0.8	2.4			13.5	5.30			290	150		
5.5	7/1.0	3.0			16.0	3.40			420	300		
8	7/1.2	3.6			18.0	2.36			590			
直径mm	-	1.0	0.8		9.8	23.3			125	300	たば	
1.0		1.2			10.5	16.1			145			
1.2		1.6			11.5	9.10			190			
1.6		2.0			12.5	5.76			250			150
2.0		2.6			15.0	3.42			385			
2.6		3.2			17.0	2.25			550			300
3.2												