


VVF JIS C 3342

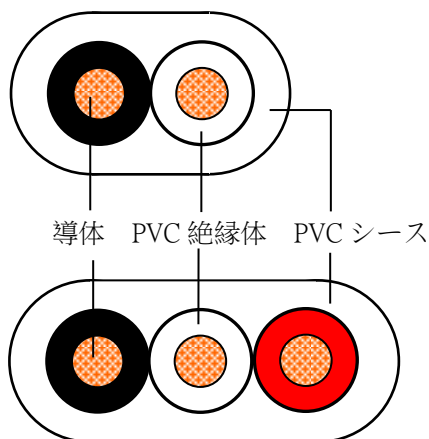

製品仕様

1. 品名記号: VVF
2. 導体: 軟銅撚り線
3. 絶縁体・シース: PVC
4. 定格温度: 60℃
5. 定格電圧: 600V 以下
6. JIS C3342 認証製品

2心																	
導体			絶縁体 厚さ	シース 厚さ	仕上外径 (約)	導体抵抗 (20℃)	試験電 圧	絶縁抵抗 (20℃)	参考								
公称断面積	構成	外径 (約)							概算質量 kg/km	標準条 長 m	包装						
mm ²	No./mm	mm	mm	mm	mm	Ω/km	V	MΩ・km									
2.0	7/0.6	1.8	0.8	1.5	6.4×9.8	9.24	1500	50	150	200	たば						
3.5	7/0.8	2.4			7.0×11.0	5.20			154								
5.5	7/1.0	3.0			8.0×13.0	3.33			210								
8	7/1.2	3.6			9.0×15.0	2.31			285	150							
直径mm	-	1.0	0.8		5.6×8.2	22.8			65	200	たば						
1.2		1.2			5.8×8.6	15.8			75								
1.6		1.6			6.2×9.4	8.92			100								
2.0		2.0			6.6×10.5	5.65			130								
2.6		2.6	1.0		7.6×12.5	3.35			190								
3.2		3.2	1.2		8.6×14.5	2.21			270								
3心																	
2.0		7/0.6	1.8		0.8	1.5			6.4×13.5			9.24	1500	50	150	200	たば
3.5	7/0.8	2.4	7.0×15.0	5.20			210										
5.5	7/1.0	3.0	8.0×18.0	3.33			305	150									
8	7/1.2	3.6	9.0×21	2.31			420	200									
直径mm	-	1.0	0.8	5.6×11.0	22.8		90	200	たば								
1.2		1.2		5.8×11.5	15.8		105										
1.6		1.6		6.2×13.0	8.92		140										
2.0		2.0		6.6×14.0	5.65		185										
2.6		2.6	1.0	7.6×17.0	3.35		280										
3.2		3.2	1.2	8.6×20	2.21		395			150							