


## Outdoor UG Optical cable 144 core(GYTA53)

### Product structure diagram

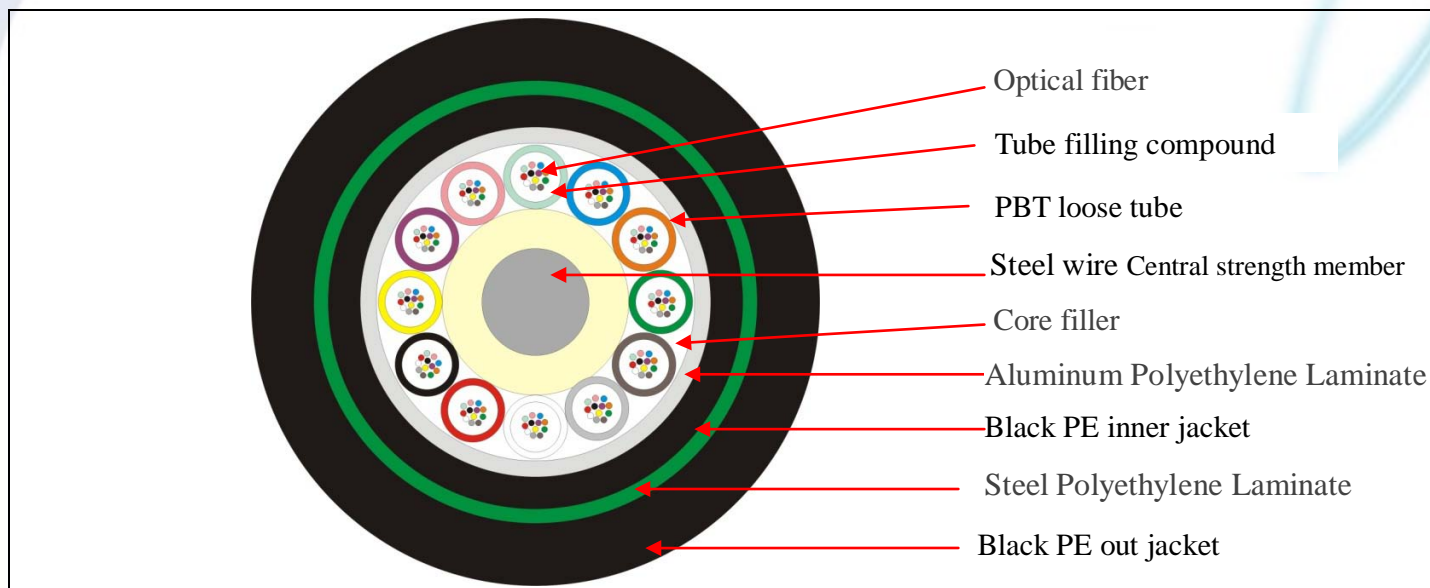

### Construction

1. Colored fiber  
Coated outside diameter:  $125.0 \pm 0.1 \mu\text{m}$   
Optical fiber diameter:  $242 \pm 7 \mu\text{m}$   
UV color fiber: Standard chromatogram  
-Blue, Orange, Green, Brown, Gray/Slate, White, Red, Black, Yellow, Violet, Rose/Pink, Aqua
  2. Tube filling compound(Gel)
  3. PBT loose tube
  4. Steel wire Central strength member
  5. Core filler
  6. Aluminum Polyethylene Laminate
  7. Black PE inner jacket
  8. Steel Polyethylene Laminate
  9. Recognition guide
  10. Black PE out jacket
- Outside diameter:  $17.5 \pm 0.5 \text{mm}$

### Parameters of fiber

Optical fiber type	Unit	SM G652	SM G652D	MM 50/125	MM 62.5/125	MM OM3-300
Waveband	nm	1310/1550	1310/1550	850/1300	850/1300	850/1300
Attenuation	dB/km	0.36/0.23	0.36/0.23	3.0/1.0	3.0/1.0	3.0/1.0

### Product parameters

Performance	Long-term	Short-term
Max. Tension (N)	1000	3000
Max. Crushing Resistance(N/100mm <sup>2</sup> )	1000	3000
Min. Bending Radius	30D(Dynamic)	15D(Static)
Storage and operating temperature	$-40^{\circ}\text{C} - +70^{\circ}\text{C}$	

### Appearance and packaging

1. No damage on the surface; no trachoma.
2. Wooden tray packaging; wood whole seal packaging
3. Segment length: no less than 1000M. The segment length of each tray of the same batch shall be similar as much as possible. Other lengths can be agreed upon through consultation.
4. Report certificate: It includes optical cable inspection number, optical cable type, core number, optical fiber type, length, etc